




# Steel Storage Rack

MODEL NUMBER (s)

UR-364

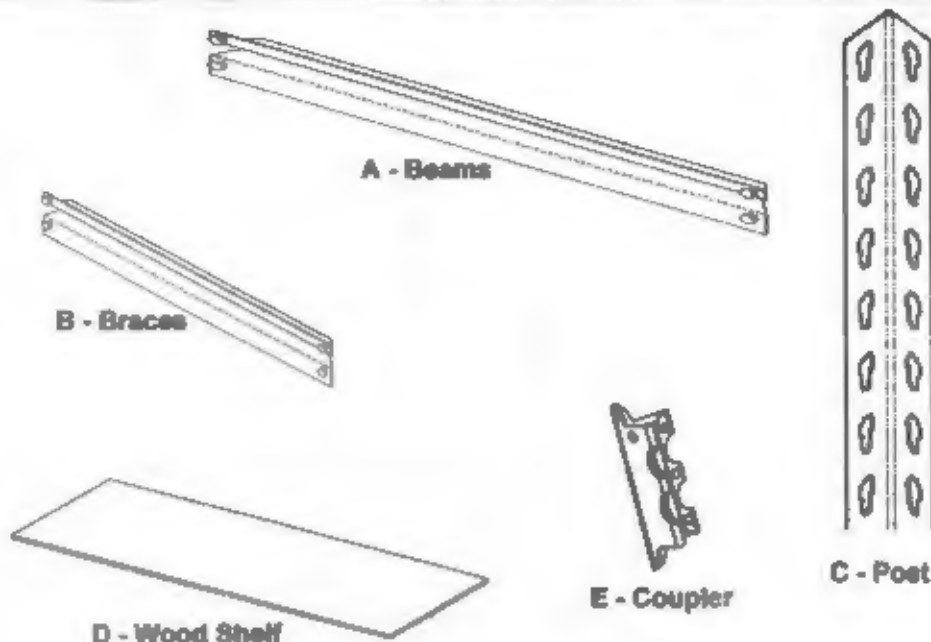

UR-364 4 Shelf - 60" h x 18" d x 36" w

Description	Qty.	Part Number	Part Size
A - Beams	8	RUBE3502	35 7/16"
B - Braces	8	RUBE1702	17 7/16"
C - Post	8	RUPT 3002S	30"
D - Wood Shelf	4	RPB21836	35 29/32"
E - Coupler	4	RMPC0409	4"

## Safety Instructions

These units should be placed on a level surface. Failure to do so can result in poor product performance or create a possible safety hazard. This unit should be securely anchored to a wall or floor with suitable fasteners, which are not included. Do not use this unit for anything other than the manufactures intended purpose. **DO NOT STAND ON ANY PART OF THE UNIT, OR USE IT AS A LADDER.** Evenly distribute the weight on each level and always keep the heavier loads on the bottom. Use care when working with metal parts.

## General Instructions

Assembly is done with the rivets of the beams and braces fitting into the slots of the post. A rubber mallet may be used on the beams and braces to seat the rivets properly. A hammer can also be used, providing one uses a cloth or a block of wood between the hammer head and the parts to prevent damage. Tap gently and be sure the rivets are snug and fully engaged.

Should you have any comments, damage, missing parts, or problems with assembly of this unit please feel free to contact our Edsal manufacturing facility at, (773) 475-3137 and request customer service. We can also be reached on the internet at the following email address : [service@edsal.com](mailto:service@edsal.com).

To obtain replacement parts, please provide the following information :

- Model # - Part # & Description - Location Purchased - Date Purchased

Consumer Products Division  
Edsal Manufacturing Company  
4400 South Packers Avenue  
Chicago, IL 60609


# Assembly Instructions for UR364

## Step


# 1

**Figure B**


Note:  
Post are  
directional.  
The slot  
must point  
down.

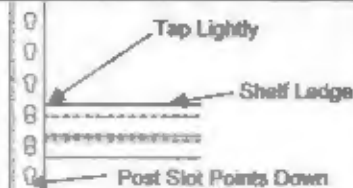

**Figure A**



**Figure C**

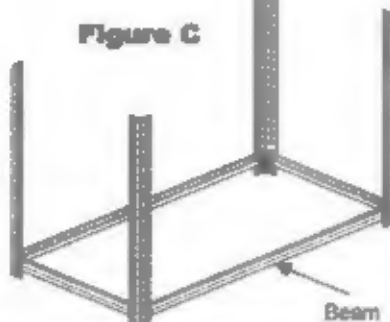


Assemble two (2) post with one (1) brace (see figure A). Skipping one slot from the bottom of the post, place the rivets into post with the shelf ledge facing up (see figure B). Tap lightly to seat rivets. Repeat with two (2) post and one (1) brace. Assemble the two (2) post end units with two (2) beams (see figure C). Skip one slot from the bottom of post, tap lightly to seat rivets.

## Step

# 2

Wood Shelf

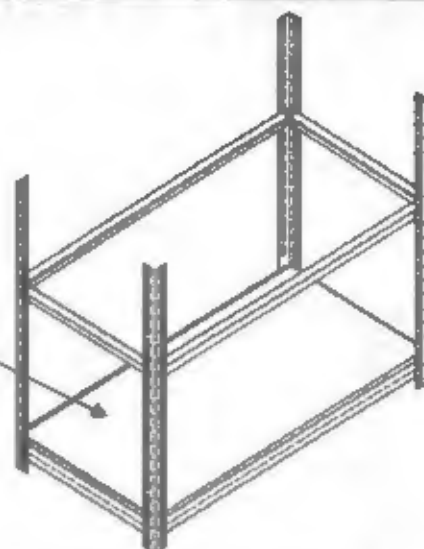

Start by adding a wood shelf to the level previously built, then continue working by adding the second level using two (2) beams and two (2) braces in the post slots of your desired location. Again place the rivets of the beams and braces into the post slot with the shelf ledge facing up and tap lightly to seat the rivets.


**IMPORTANT NOTE :** Make sure all rivets are fully seated into the post slots.

## Step

# 3

Note:  
Post are  
directional.  
The slot  
must point  
down.


**Figure D**

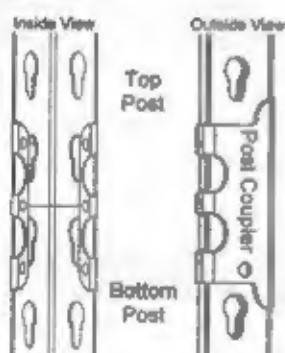

Add a wood shelf to the previously built level, then assemble the top post to the bottom post by using four (4) post couplers. Place the couplers into the top of the bottom post, and the bottom of the top post and tap down to properly seat (see figure D). Continue by adding the third level using two (2) beams and two (2) braces just above the post couplers. Again tap lightly to seat the rivets.

## Step

# 4

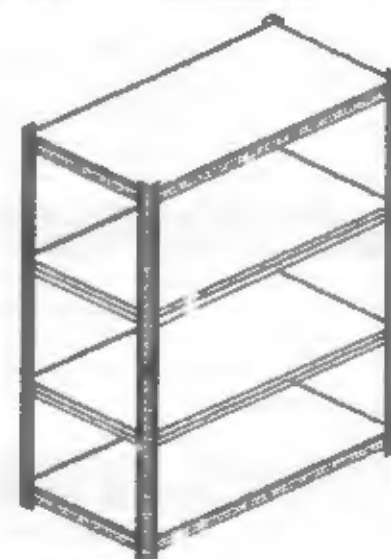

Add a wood shelf to the previous built level, then continue by adding the final level to the unit using two (2) beams and (2) braces. Tap lightly to properly seat the rivets and add the final wood shelf to the top of the unit.